

KAPTIV-CS

Electronic zero air loss drain with alarm function

PRODUCT FEATURES

The KAPTIV-CS (Compact Solution) removes all types of condensate from compressed air systems up to 100 m³/min. without the loss of compressed air.

The KAPTIV-CS is cost effective and offers a rapid pay-back period due to a competitive pricing level, low stocking cost, zero air loss and energy saving features.

The compact industrial robust housing, 2/2 way direct acting valve with a large orifice, alarm feature (potential free relay) and the integrated mesh strainer make the KAPTIV-CS a highly reliable draining solution.

Equipped with a digital, LED illuminated, sight-port/level indicator showing you the condensate level inside the reservoir and enabling you to monitor the KAPTIV-CS's operation, even in poor lit places.



COMMERCIAL BENEFITS

- Competitive compact zero air loss draining solution
- Zero air loss technology saves air, energy and money
- Rapid pay-back period due to competitive pricing level and reduced stocking costs
- One model covers compressor capacities up to 100 m³/min.
- No sizing charts required, offering stocking advantages
- Consult factory for D-LUX models (a variant that offers extensive programming options)
- Consult JORC for private labelling options


TECHNICAL ADVANTAGES

- Alarm feature (potential free relay) standard incorporated
- Visual alarm (LED) indication
- Digital, LED illuminated sight-port/level indicator
- Zero air loss during condensate discharge
- Successful draining of all types of condensate due to large orifice
- Easy installation and visual display of operating status
- Integrated mesh strainer
- Direct acting valve assembly, ensuring reliable discharge operation
- Robust corrosion resistant aluminium housing
- Easy and quick to service
- Optional heater for cold weather applications available

KAPTIV-CS

Electronic zero air loss drain with alarm function

DIMENSIONS

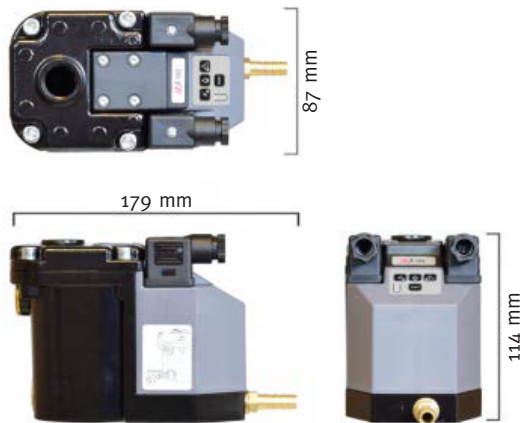

Digital sight port/level indicator



Multiple inlets offer installation flexibility

TECHNICAL SPECIFICATIONS

Max. compressor capacity	100 m ³ /min. (3500 CFM)
Max. drainage capacity	665 litres condensate per hour at 16 bar
Min./Max. system pressure	0 - 16 bar
Min./Max. medium temperature	1 - 50 °C
Min./Max. ambient temperature	1 - 50 °C
Supply voltage options	24 VDC, 24 VAC, 115 VAC and 230 VAC 50/60 Hz.
Environmental protection	IP65 (NEMA4)
Connector type (power and alarm)	DIN 43650-B
Inlet connections	1/2" BSP or NPT (3 inlet options)
Inlet height	11 cm (top) and 7.5 & 1.5 cm (side)
Outlet connection	1/4" BSP with brass hose barb adapter
Valve type	2/2 way, direct acting
Valve orifice	4 mm
Valve seals	FPM
Serviceable valve	Yes
Integrated mesh strainer	Yes
Housing material	Corrosion resistant aluminium, EP coated
Test feature	Yes
Visual alarm	Yes, LED indication
Alarm feature type A3 (N/O)*	Normally open alarm output contact (potential free relay)
Alarm feature type A4 (N/C)**	Normally closed alarm output contact (potential free relay)



Integrated mesh filter protects the valve against large contaminants



Optional heater for cold weather applications available

*A3 = Normally open contacts, closed when in alarm phase. LED on the drain is OFF when in operation and ON when in alarm mode.
 **A4 = Normally closed contacts, open when in alarm phase. LED on the drain is OFF when in operation and ON when in alarm mode.

JORC is NEN - EN - ISO 9001:2015 certified

Information provided herewith is believed to be accurate and reliable. However, no responsibility is assumed for its use or for any infringement of patents or rights of others, which may result from its use. In addition, JORC reserves the right to revise information without notice and without incurring any obligation.

JORC Industrial BV
 Pretoriastraat 28
 NL-6413 NN Heerlen
 The Netherlands

Tel. +31 45 5242427
 info@jorc.nl
 www.jorc.eu

